

XOOM™ OUT

XOOM™ IN

INFINITE
CIRCULAR
FASCINATION





XOOM™ IN

The XOOM™ IN is a circular luminaire, a floating design object. The light shines inside the ring shape and floods the space with a unique play of light.

The XOOM™ IN accentuates architecture by its unique play of light and shadow without pushing into the foreground.

Although XOOM™ IN tries to trap the light inside the ring, an unmistakable light distribution floods the room and creates a unique perception of light.







XOOM™ OUT

The XOOM™ OUT reflects the original shape of a light circle. The floating light corona is a sun-like experience in open spaces.

The XOOM™ OUT stages architecture such as lobbies, high vaults or staircases. The luminaire is eye-catching, but the circular light emission highlights the architectural space relentlessly.

XOOM™ IN / XOOM™ OUT

Technical data

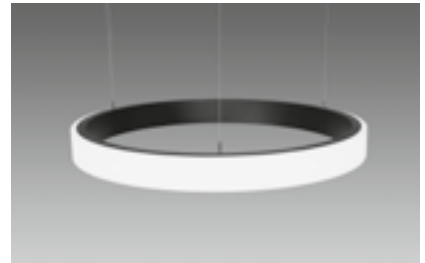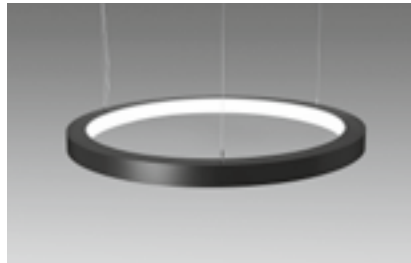


XOOM™ IN

XOOM™ OUT

Light engine	VarioLED™ Flex HYDRA White
Available CCTs	2,500 K, 2,700 K, 3,000 K, 4,000 K, (IQ White on request)
Lifetime	60,000 h L90/B10
Supply voltage	220 - 240 VAC, 50 - 60 Hz
Ambient / Storage temperature	-10°C ... 40°C
Color Rendition / TM30	CRI > 85, Rf > 83, Rg = 98... 101

Diameter	1,000 mm	1,400 mm	1,000 mm	1,400 mm
Lumen output				
W825	6,300 lm	8,820 lm	5,200 lm	7,560 lm
W827	6,680 lm	9,350 lm	5,490 lm	7,990 lm
W830	7,090 lm	9,920 lm	5,840 lm	8,500 lm
W840	7,610 lm	10,660 lm	6,290 lm	9,140 lm
Power	96 W	135 W	83 W	120 W
Efficacy @ 4,000 K	80 lm/W		76 lm/W	



Photometric code




LM 79 compliant




LM 80 compliant

Light distributions

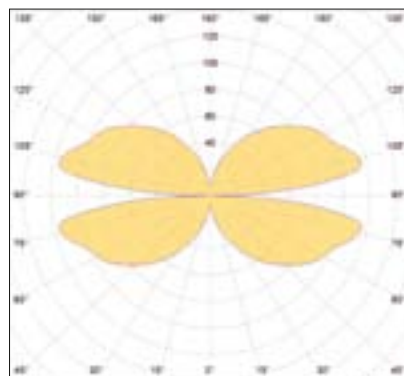

cd/klm
 — C0 - C180 — C90 - C270
 $\eta = 100\%$

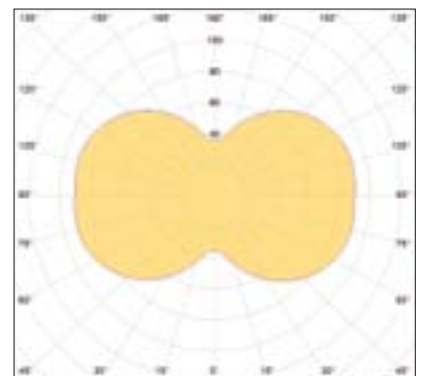

cd/klm
 — C0 - C180 — C90 - C270
 $\eta = 100\%$

XOOM™ IN / XOOM™ OUT

Order code

Your order code	XOOM	IN	W8__	_____	_	_	_	C	IP40
Your order code	XOOM	OUT	W8__	_____	_	_	_	C	IP40
Order code example	XOOM	IN	W830	1400	B	C	E	C	IP40

Model

Light emission inside circle IN

Light emission outside circle OUT

Color temperature

2,500 K 25

2,700 K 27

3,000 K 30

4,000 K 40

Diameter

1,000 mm 1000

1,400 mm 1400

Profile color (powder coating)

Silver S

Black B

White W

Mounting option

Recessed canopy R

Ceiling mounted canopy C

Ceiling mounted canopy with suspension S

Supply voltage

220 - 240 VAC E



110 - 270 VAC W

Control option


DALI (Standard) C

Ingress protection

IP40 IP40

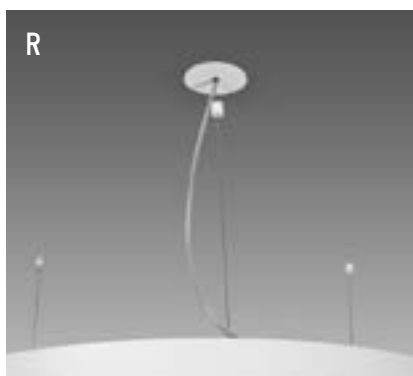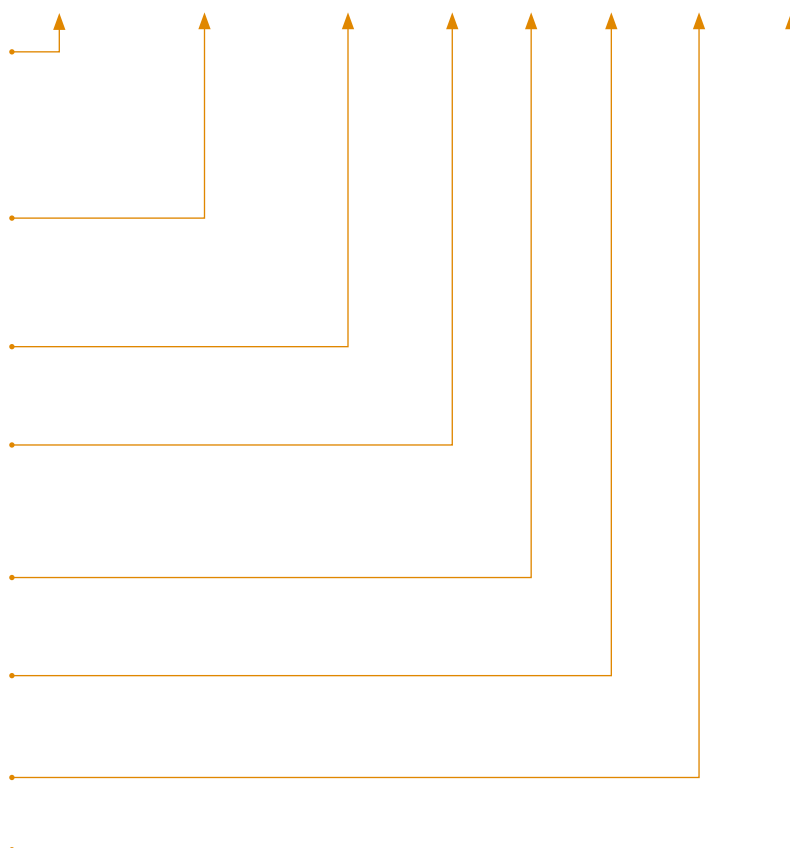

Canopy for recessed installation.
3 suspension points.

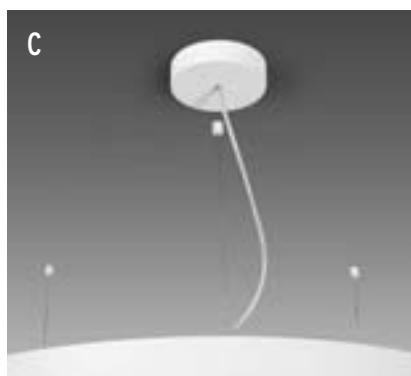

Canopy for ceiling installation.
3 suspension points.



Canopy for ceiling installation,
suspension integrated.

LED LINEAR™
lighting solutions

Member of the
Fagerhult Group



LED Linear™ GmbH
Pascalstraße 9
47506 Neukirchen-Vluyn
Germany
Phone +49 2845 98462-0
Fax +49 2845 98462-120
Germany@led-linear.com



LED Linear™ GmbH | XOOM™ IN / XOOM™ OUT | Edition 2017 | All rights reserved. | The technical data was correct at time of print. Subject to change.
Designed by beckdesign.eu, Germany